

The University of Reading

A ghost fluid, moving finite volume plus remap
method for compressible Euler flows.

Abstract

A numerical solution method for accurately capturing material interfaces in unsteady compressible Euler flows is presented. The method consists of a finite volume scheme on a moving computational mesh and employs the HLLC approximate Riemann solver to evaluate intercell numerical fluxes. The mesh is moved in a Lagrangian fashion with the material, and to avoid the associated grid distortion scenarios, the finite volume scheme is augmented with an algorithm to rezone the solution variables to a tangle free mesh. The focus of the work is multimaterial flows consisting of two immiscible materials separated by an interface. The interface position is tracked using a volume of fluid technique, and the flow solution at the interface is resolved using a conservative ghost fluid method.

Governing Equations

The Euler equations for one dimensional (1D), unsteady compressible flow, in the reference frame of a moving control volume, can be expressed in integral form as

$$\frac{\partial}{\partial t} \int_{\Omega(t)} \mathbf{q}(x; t) d\Omega + \int_{\Gamma(t)} \mathbf{f}(\mathbf{q}(x; t)) \cdot \hat{n} d\Gamma = 0: \quad (1)$$

The moving control volume $\Omega(t)$ is enclosed by its boundary $\Gamma(t)$, and $\hat{n}$ denotes the outward unit normal to $\Gamma(t)$. The vector of conserved variables is given by $\mathbf{q} = (\frac{1}{2}; \frac{1}{2}u; \frac{1}{2}E)^T$, and the flux vector is $\mathbf{f}(\mathbf{q}) = (u; \frac{1}{2}u^2; \frac{1}{2}Eu)^T$, where $\frac{1}{2}$ is density, u is flow velocity, $\dot{x}$ is the velocity of $\Gamma(t)$, E is specific total energy, and p is pressure. The system of equations (1) represents conservation of mass, momentum and energy. The system is completed by the ideal gas equation of state (EOS), $p = (\gamma - 1)\frac{1}{2}e$, where $e = E - \frac{1}{2}u^2$ is the specific internal energy and γ ($1 < \gamma < \frac{5}{3}$) is a constant representing the ratio of specific heat capacities of the material.

It is assumed that the flow consists of two immiscible components separated by a material interface. Both flow components can be described by a single velocity and pressure function, and each component is uniquely characterised by the value of γ in the EOS.

The finite volume scheme

The spatial domain is discretised into N non-overlapping computational cells, I_i , initially of a uniform size. The average value of $\mathbf{q}$ over each cell is approximated and stored at the cell centre (node). The governing equations (1) are discretised according to the conservative finite volume formula

$$\frac{Q_i^{n+1} \Delta x_i^{n+1} - Q_i^n \Delta x_i^n}{\Delta t} = - \left(F_{i+\frac{1}{2}} - F_{i-\frac{1}{2}} \right)$$

The HLLC Riemann solver

The principle behind the HLLC Riemann solver is to reduce the full Riemann problem to an approximate solution which consists of a wave structure involving four constant states separated by three discontinuous waves. If the wave speeds of the three discontinuities are known, then application of the integral form of the conservation laws over an appropriate control volume, produces a closed-form expression for the intercell numerical flux. The original derivation [7] was with respect to fixed reference frame. The expression below accounts for the movement of the mesh.

$$\begin{aligned}
 F_L &= (u_L \mid \dot{x}_{i-\frac{1}{2}}^n) Q_L \mid F_L^{lag} \\
 F_L^* &= (u_L \mid \dot{x}_{i-1}^n) Q_L + F_L^{lag} \mid (S_L \mid \dot{x}_{i-1}^n) Q_L + (S_L \mid \dot{x}_{i-\frac{1}{2}}^n) Q_L^* \\
 F_{i-\frac{1}{2}} &= F_{LR}^* = \frac{1}{2}(F_L^* + F_R^*)
 \end{aligned}
 \quad
 \begin{aligned}
 &\dot{x}_{i-\frac{1}{2}}^n \cdot S_L \\
 &S_L < \dot{x}_{i-\frac{1}{2}}^n \cdot S^* \\
 &\dot{x}_{i-}^n
 \end{aligned}$$

two regions are defined, the single material flow solver can be employed to evolve both sets of solution variables separately. GSV are defined and discarded respectively at the beginning and end of each moving mesh phase, with the exception of the interface cell. GSV in the interface cell are retained until the mesh is remapped, and then the magnitude of the updated volume fractions are used to determine which of the two materials is valid. An important feature of the GFM is that there is no requirement to solve a multi-material Riemann problem at the interface. The process can be optimised for implementation by applying the method only in a band of cells on either side of the interface.

The success of the GFM relies on capturing the appropriate interface conditions when defining GSV. It is fundamental that their creation should not interfere with the behaviour of the real material solution away from the interface. The simplest approach is to define the GSV to be identically equal to the real solution values, then the flow solver determines a solution to a single material version of the two material problem. However, a failing of the finite volume Riemann solver scheme is that it suffers from numerical diffusion at contact discontinuities which degrades the results of the discontinuous variables. Following the methodology of [2] it is proposed to reduce the diffusive effect by accepting the real values of the continuous variables (pressure and velocity) but to alter the values of the discontinuous variables in the ghost material. This is achieved through one-sided extrapolation of one of the discontinuous variables across the interface from a reference state. Constant extrapolation is used in order to create a continuous variable profile and to minimise the variation from the reference state. Based on work in [3] and confirmed by numerical experiment, entropy is taken to be the extrapolated value. Fig-

generated at the initial time level. The actual quantities remapped are the conserved variables. In multi-material flows each material is rezoned separately and the values of the volume fractions are modified in accordance with the transfer of data from the old mesh to the new. The remap procedure for material M in cell I_i can be expressed in integral form as

$$\bar{Q}_i^{(M)} = \frac{1}{\Delta \bar{x}_i} \int_{\bar{x}_{i-\frac{1}{2}}}^{\bar{x}_{i+\frac{1}{2}}} \tilde{Q}^{(M)}(x; t^{n+1}) dx : \quad (5)$$

The overbar denotes rezoned values and $\tilde{Q}(x; t^{n+1})$ is a piecewise polynomial function reconstructed from the cell average values Q_i^{n+1} . Equation (5) can be written as a sum of integrals over the overlap regions between cell I_i and the cells on the old distorted mesh. The accuracy of the remap procedure is determined by the degree of the piecewise polynomial function $\tilde{Q}$. In this work a piecewise linear function is reconstructed using characteristic slope limiting. Mesh vertices and nodes are remapped by simply returning them to the positions they held at the beginning of the time interval. The remapping process is conservative.

2D - Preliminary discussion

Current work is proposing to extend the presented numerical method to two dimensional, unsteady multimaterial compressible Euler flows. The governing equations can be written in integral form as

$$\frac{d}{dt} \int_{\Omega(t)} q(x; y; t) d\Omega + \int_{\Gamma(t)} (f(q(x; y; t)); g(q(x; y; t))) \cdot \hat{n} d\Gamma = 0 ; \quad (6)$$

where $\Omega(t)$ is the moving control volume enclosed by its boundary $\Gamma(t)$, $q = (\frac{1}{2}; \frac{1}{2}u; \frac{1}{2}v; \frac{1}{2}E)$, $f(q) = (u; \dot{x})q + (0; p; 0; up)$, $g(q) = (v; \dot{y})q + (0; 0; p; vp)$, and $\hat{n}$ denotes the outward unit normal to $\Gamma(t)$. The system of equations (6) is discretised through the following dimensional splitting

$$Q_{i;j}^{n+1'} = \frac{\Omega_{i;j}^n}{\Omega_{i;j}^{n+1'}} Q_{i;j}^n + \frac{\Delta t}{\Omega_{i;j}^n} \left(s_{i+\frac{1}{2};j}^n F_{i+\frac{1}{2};j} - s_{i-\frac{1}{2};j}^n F_{i-\frac{1}{2};j} \right) ; F_{i-\frac{1}{2};j}^n Q_{i-1;j}^n ; Q_{i;j}^n ; \bar{u} \quad (7)$$

$$Q_{i;j}^{n+1} = \frac{\Omega_{i;j}^{n+1'}}{\Omega_{i;j}^{n+1}} Q_{i;j}^{n+1'} + \frac{\Delta t}{\Omega_{i;j}^{n+1}} \left(s_{i;j+\frac{1}{2}}^{n+1'} G_{i;j+\frac{1}{2}} - s_{i;j-\frac{1}{2}}^{n+1'} G_{i;j-\frac{1}{2}} \right) ; G_{i;j-\frac{1}{2}}^{n+1'} Q_{i;j-1}^{n+1'} ; Q_{i;j}^{n+1'} ; \bar{v} \quad (8)$$

where $\Omega_{i;j}^n$ is the volume of cell $I_{i;j}$ at time t^n , $\bar{u}$, $\bar{v}$, and $s_{i-\frac{1}{2};j}$, $s_{i;j-\frac{1}{2}}$ are respectively facial velocities and lengths calculated in accordance with a geometric conservation law [8]. $F_{i-\frac{1}{2};j}$ and $G_{i;j-\frac{1}{2}}$ are numerical approximations to the time average flux across faces $\Gamma_{i-\frac{1}{2};j}$ and $\Gamma_{i;j-\frac{1}{2}}$ respectively. They are evaluated by solving the x and y split one dimensional Riemann problem using the HLLC Riemann solver in conjunction with the GFM. Evaluation of Δt takes into account wave speeds and mesh dimensions in both spatial directions.

The principle of the GFM in 2D is the same as in 1D. However, in 2D defining the GSV is more involved since there is more than one velocity component and a choice for the direction of extrapolation must be made. The GSV for the pressure and velocity components are defined by setting them equal to the real material values in each cell in the computational domain. Constant extrapolation of entropy into cells containing

and bordering the interface is performed in the direction of the normal to the interface. The normal value is extracted from a piecewise linear interface reconstructed from the fractional volume data.

The interface reconstruction algorithm is based on an approach developed in [1]. Reconstruction of a linear interface in an interface cell is transformed to a problem that analyses a ‘local central dual’ mesh of the interface cell in question and its eight surrounding cells. Each vertex in the dual mesh has associated with it the volume fraction of the cell within which it is centred. Material boundaries on the dual mesh are found by considering the volume fractions in ‘material space’ and evaluating intersections with Voronoi cells that represent the regions where one material dominates. These intersections are used to calculate interface points on the dual mesh. With a complete set of interface points on the dual mesh the interface line, created through connection of the interface points, is transformed into a linear approximation to the interface within the original interface cell. The position of the interface line is adjusted to ensure the correct volume fraction is captured.

In 2D the remap procedure remains an integration problem, with each material being rezoned separately through integration over polygonal mesh overlap regions.

At present a conservative correction algorithm has not been implemented with the 2D scheme.

Numerical Results

In 1D, the selected test problem is a two material shock tube problem based on [6]. The initial conditions of the test consist of two constant states separated by a discontinuity. The two states are given by $(\frac{1}{2}_L; u_L; p_L)^T = (1.0; 0.0; 1.0)^T$ and $(\frac{1}{2}_R; u_R; p_R)^T = (0.125; 0.0; 0.1)^T$ with $\rho_L = 1.6$ and $\rho_R = 1.2$. The discontinuity was initially situated at $x = 0.505$. The numerical (dotted line) and exact (solid line) solutions are computed in the spatial domain $[0; 1]$ and the output time is $t = 0.2$ seconds. The numerical solution is computed with 100 cells and transmissive boundary conditions are applied. Figure 2(a) shows good agreement between the numerical and analytical solutions. The test problem

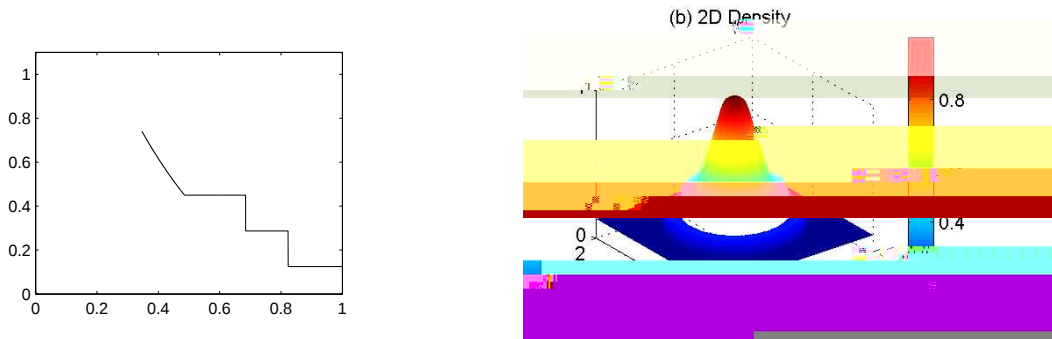


Figure 2: Solution plots for Density in the (a) 1D and (b) 2D tests problems.

is extended to 2D using a cylindrical explosion problem [7]. The governing equations are solved in the spatial domain $[0; 2] \times [0; 2]$. Initial conditions consist of a region inside a circle of radius 0.4 centred at (1,1), and the region outside of this circle. Initially, the flow variables take constant values in each of these regions, and are joined by a circular discontinuity. The two states are given by $(\frac{1}{2}_{in}; u_{in}; v_{in}; p_{in})^T = (1.0; 0.0; 0.0; 1.0)^T$ and $(\frac{1}{2}_{out}; u_{out}; v_{out}; p_{out})^T = (0.125; 0.0; 0.0; 0.1)^T$ with $\rho_L = 1.6$ and $\rho_R = 1.2$. The output

time is $t = 0.2$ seconds. Results are shown in Figure 2(b).

References

- [1] Bonnell KS, Duchaineau MA, Schhikore DR, Hamann B, Joy KI *Material interface reconstruction* Lawrence Livermore National Laboratory Report
- [2] Fedkiw RP, Aslam T, Merriman B, Osher S *A non-oscillatory eulerian approach to interfaces in multimaterial flows (the ghost fluid method)* Journal of Computational Physics, 1999, vol. 152, 457-492
- [3] Fedkiw RP, Marquina A, Merriman B *An isobaric fix for the overheating problem in multimaterial compressible flows* Journal of Computational Physics, 1999, vol. 148, 545-578
- [4] Miller GH, Puckett EG *A high-order godunov method for multiple condensed phases* Journal of Computational Physics, 1996, vol. 128, 134-164
- [5] Nguyen D, Gibou F, Fedkiw R *A fully conservative ghost fluid method method and sti detonation waves* unpublished
- [6] Sod, G *A Survey Of Several Finite Di erence Methods For Systems Of Nonlinear Hyperbolic Conservation Laws*. Journal of Computational Physics 27, 1-31 (1978)
- [7] Toro EF *Riemann solvers and numerical methods for fluid dynamics* Springer-Verlag 1997
- [8] Zhang H, Reggio M, Treèpanier JY, Camarero R *Discrete form of the GCL for moving meshes and its implementation in CFD schemes* Computers & Fluids, 1993, vol. 22, 9-23,